



## ABOUT US

- For over four decades, Fischer has been at the forefront of the electrical industry, introducing the very best that technology has to offer in the world of wiring devices. Our products not only understood your present needs, but some, even your future ones. Developed using processes that have been refined over the years, our products made you smile with joy and satisfaction.
- The story of creating innovative, high-quality products continues in the field of LED manufacturing. We guarantee, that like every product that we manufacture, the LEDs we make are innovative, aesthetically pleasing, and energy efficient along with being easy to maintain and replace. As always, we continue to focus on delivering customer delight through value for money product and reliable service, each and every time.
- We welcome you to witness the exciting developments in the world of LEDs by Fischer. It your imagination come true.

## INDEX

|                             |       |
|-----------------------------|-------|
| <b>WOVEN MAGNETIC TRACK</b> | ..... |
| <b>PC PANEL</b>             | ..... |
| <b>TRACK LIGHT</b>          | ..... |
| <b>DEEP DOWN LIGHT</b>      | ..... |
| <b>COB DOWN LIGHT</b>       | ..... |
| <b>SPOT LIGHT</b>           | ..... |
| <b>GOLD SERIES</b>          | ..... |
| <b>2x2 TILE LIGHT</b>       | ..... |
| <b>CYLINDERS</b>            | ..... |
| <b>LINEAR LIGHT</b>         | ..... |
| <b>HIGH BAY LIGHT</b>       | ..... |
| <b>FLOOD LIGHT</b>          | ..... |
| <b>STRIPS</b>               | ..... |
| <b>POWER SUPPLY</b>         | ..... |
| <b>ROPE LIGHT</b>           | ..... |
| <b>OUTDOOR LIGHTS</b>       | ..... |
| <b>SENSOR</b>               | ..... |
| <b>MAGNETIC LIGHT</b>       | ..... |





ULTRA THIN LINEAR TRACK



WOVEN TRACK





WOVEN TRACK | ULTRA THIN LINEAR TRACK | FULL RANGE OF LAMPS

48V PRODUCT DISPLAY

The whole series of rails and lamps can be freely matched to make the lighting space more flexible.





8Watts  
15Watts  
22Watts

## PC PLASTIC PANEL

POWER : 8W, 15W, 22W

CCT : 4000K, 6000K

DIAMETER : 4INCH, 6INCH, 8 INCH

DESCRIPTION: 2835 Bridgelux SMD LED  
LUMENS : 110Lm/W  
SHAPE : SQUARE, ROUND  
BODY : WHITE



8Watts  
18Watts  
24Watts

## PC SURFACE

POWER : 8W, 18W, 24W

CCT : 4000K, 6000K

DIAMETER : 4 INCH, 6 INCH, 8 INCH

DESCRIPTION: 2835 Bridgelux SMD LED  
LUMENS : 110Lm/W  
SHAPE : ROUND  
BODY : WHITE



## CONCEALED LIGHT

POWER : 9W  
CCT : 4000K, 6000K, 3 IN ONE  
DIAMETER : 3 INCH  
DESCRIPTION: 2835 Bridgelux SMD LED  
LUMENS : 110Lm/W  
SHAPE : ROUND  
BODY : WHITE



9Watts

**Burning Life:**  
30000 Hrs

## TRACKO SERIES, TRACK LIGHT

POWER : 12W , 24W, 36W  
CCT : 3000K, 4000K, 6000K,  
3in one  
DESCRIPTION: COB: BRIDGELUX COB  
LUMENS :110Lm/w  
BEAM ANGLE: 24°  
IP : IP40  
BODY : WHITE, BLACK



COB LIGHT

12Watts  
24Watts  
36Watts





Burning Life:  
 30000 Hrs

**AURA SERIES,**  
 DOWN LIGHT PANEL



12Watts  
 18Watts

|             |                                                                                                           |
|-------------|-----------------------------------------------------------------------------------------------------------|
| POWER       | : 12W, 18W                                                                                                |
| CCT         | : 4000K, 6000K                                                                                            |
| DIAMETER    | : Body : 91X45mm<br>Cut : 80mm<br>Body : 150X53mm<br>Cut : 92mm                                           |
| DESCRIPTION | : 2835 Bridgelux SMD LED<br>LUMENS : 110Lm/W<br>Beam Angle : 60°<br>IP Rate : IP40<br>BODY : BLACK, WHITE |

Super Heavy Aluminum Housing

**WOLF SERIES,**  
 DEEP DOWN LIGHT PANEL



12Watts  
 18Watts

|             |                                                                                                           |
|-------------|-----------------------------------------------------------------------------------------------------------|
| POWER       | : 12W, 18W                                                                                                |
| CCT         | : 4000K, 6000K                                                                                            |
| DIAMETER    | : Body : 120X40mm<br>Cut : 105mm<br>Body : 145X40mm<br>Cut : 130mm                                        |
| DESCRIPTION | : 2835 Bridgelux SMD LED<br>LUMENS : 110Lm/W<br>Beam Angle : 60°<br>IP Rate : IP40<br>BODY : BLACK, WHITE |



**Burning Life:**  
**30000 Hrs**

## RUSH SERIES, COB DOWNLIGHT

|          |                                                                                                |
|----------|------------------------------------------------------------------------------------------------|
| POWER    | : 7W, 12W, 18W                                                                                 |
| CCT      | : 3000K, 4000K, 6000K                                                                          |
| DIAMETER | : Body : 65X60mm<br>Cut : 65mm<br>Body : 75X85mm<br>Cut : 75mm<br>Body : 95X95mm<br>Cut : 85mm |

|             |                                                                                                                                                 |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| DESCRIPTION | : COB : BRIDGELUX COB<br>Luminous : 110Lm/W<br>Beam Angle : 24°<br>IP Rate : IP40<br>BODY : BLACK, WHITE<br>REFLECTOR : ROSE GOLD,<br>GUN BLACK |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------|

7Watts  
12Watts  
18Watts

## FOX SERIES, COB DOWN LIGHT

|          |                                |
|----------|--------------------------------|
| POWER    | : 12W                          |
| CCT      | : 3000K, 4000K, 3 IN ONE       |
| DIAMETER | : Body : 45X87mm<br>Cut : 80mm |

|             |                                                                                                                                                 |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| DESCRIPTION | : COB : BRIDGELUX COB<br>Luminous : 110Lm/W<br>Beam Angle : 24°<br>IP Rate : IP40<br>BODY : BLACK, WHITE<br>REFLECTOR : ROSE GOLD,<br>GUN BLACK |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------|

12Watts





**Burning Life:**  
**30000 Hrs**

## PABLO SERIES, SPOT LIGHT

|             |                                                                                                                               |
|-------------|-------------------------------------------------------------------------------------------------------------------------------|
| POWER       | : 7W,12W                                                                                                                      |
| CCT         | : 3000K, 4000K                                                                                                                |
| DIMENSION   | : BODY : 63X52<br>CUT : 55MM<br>BODY : 85X64<br>CUT : 75 MM                                                                   |
| DESCRIPTION | : COB: BRIDGELUX COB<br>LUMEN : 110lm/W<br>BEAM ANGLE : 24°, 36°<br>IP : IP40<br>BODY : WHITE, BLACK<br>REFLECTOR : GUN BLACK |



7Watts  
12Watts

## OMEN SERIES, SPOT LIGHT

|             |                                                                                                 |
|-------------|-------------------------------------------------------------------------------------------------|
| POWER       | : 7W, 12W                                                                                       |
| CCT         | : 3000, 4000K 3 IN ONE                                                                          |
| DIMENSION   | : BODY : 62X78<br>CUT : 55 MM<br>BODY : 72X78<br>CUT : 65 MM                                    |
| DESCRIPTION | : COB: BRIDGELUX COB<br>LUMEN : 110lm/W<br>BEAM ANGLE : 30°<br>IP : IP40<br>BODY : WHITE, BLACK |



7Watts  
12Watts



**Burning Life:**  
30000 Hrs

## CLASSIC SERIES, SPOT LIGHT

POWER : 7W, 12W  
CCT : 3000K, 4000K  
DIMENSION : BODY : 75X40  
CUT : 75MM  
BODY : 85X50  
CUT : 85MM

DESCRIPTION: COB : Bridgelux COB  
LUMENS : 110Lm/W  
BEAM ANGLE : 30°  
IP : IP40  
BODY : WHITE, BLACK



7Watts  
12Watts

## PLATINUM SERIES SPOT LIGHT

POWER : 12W  
CCT : 3000K, 4000K  
DIMENSION : BODY : 80X48  
CUT : 75MM

DESCRIPTION: COB : Bridgelux COB  
LUMENS : 110Lm/W  
BEAM ANGLE : 38°  
IP : IP40  
BODY : WHITE, BLACK  
BRASS



12Watts





**Burning Life:**  
30000 Hrs

## CLASSIC PRO SPOT LIGHT

POWER : 12W  
CCT : 3000K, 4000K  
DIMENSION : BODY : 40X90  
CUT : 75MM X 85MM

DESCRIPTION: COB : BRIDGELUX COB  
LUMEN : 110Lm/W  
BEAM ANGLE : 40°  
IP: IP40  
BODY : WHITE, BLACK




12Watts

## UNIK SERIES DOWN LIGHT

POWER : 12W  
CCT : 3000K, 4000K  
DIMENSION : BODY : 50X85  
CUT : 75MM

DESCRIPTION: CHIP : BRIDGELUX CHIP  
LUMEN : 110Lm/W  
BEAM ANGLE : 40°  
IP: IP40  
BODY : WHITE, BLACK

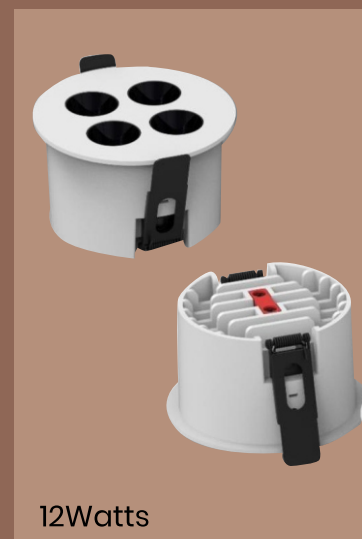

12Watts



**Burning Life:**  
30000 Hrs

## GIVA SERIES, SPOT LIGHT

|           |                |
|-----------|----------------|
| POWER     | : 7W, 12W      |
| CCT       | : 3000K, 4000K |
| DIMENSION | : BODY : 65X85 |
|           | CUT : 55MM     |
|           | BODY : 85X85   |
|           | CUT : 75 MM    |

DESCRIPTION: COB : BRIDGELUX COB  
LUMENS : 110Lm/w  
BEAM ANGLE : 36°  
IP : IP40  
BODY : WHITE



7Watts  
12Watts

## MATRIX SERIES, SPOT LIGHT

|           |                 |
|-----------|-----------------|
| POWER     | : 7W, 12W       |
| CCT       | : 3000K, 4000K  |
| DIMENSION | : BODY : 160X90 |
|           | CUT : 55MM      |
|           | BODY : 160X110  |
|           | CUT : 75MM      |

DESCRIPTION: COB : BRIDGELUX COB  
LUMENS : 110Lm/w  
BEAM ANGLE : 38°  
IP : IP40  
BODY : WHITE, GREY



7Watts  
12Watts





**Burning Life:**  
**30000 Hrs**

## SLEEK SERIES, SPOT LIGHT

POWER : 10W  
CCT : 3000K, 4000K  
DIMENSION : BODY : 35X85  
CUT : 75MM

DESCRIPTION: COB : BRIDGELUX COB  
LUMENS : 110Lm/w  
BEAM ANGLE : 38°  
IP : IP40  
BODY : WHITE  
REFLECTOR : GUN BLACK



10Watts

## GOLD SERIES, DOWN LIGHT

POWER : 30W ,50W  
CCT : 3000K  
DIMENSION : BODY : 160X90MM  
CUT : 145MM  
BODY : 160X110  
CUT : 145MM

DESCRIPTION: COB: BRIDGELUX COB  
LUMENS :110Lm/w  
BEAM ANGLE: 38°  
IP : IP40  
BODY : WHITE



30Watts  
50Watts



**Burning Life:**  
30000 Hrs

## HEXA SERIES, • COB DOWNLIGHT • PANEL DOWNLIGHT



12Watts

|             |                                                                                                                                      |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------|
| POWER       | : 12W                                                                                                                                |
| CCT         | : 3000K, 4000K, 600K                                                                                                                 |
| DIAMETER    | : BODY : 64X85MM<br>CUT : 75MM                                                                                                       |
| DESCRIPTION | : COB : BRIDGELUX COB<br>LUMINOUS : 100LM/W<br>BEAM ANGLE : COB24°<br>SMD120°<br>IP RATE : IP40<br>BODY : WHITE+WHITE<br>WHITE+BLACK |

## FOCUS SERIES, COB DOWN LIGHT



12Watts

20Watts

|             |                                                                                                      |
|-------------|------------------------------------------------------------------------------------------------------|
| POWER       | : 12W, 20W                                                                                           |
| CCT         | : 3000K, 4000K                                                                                       |
| DIAMETER    | : BODY : 90X90MM<br>CUT : 80MM<br>BODY : 110X110MM<br>CUT : 100MM                                    |
| DESCRIPTION | : COB : BRIDGELUX COB<br>LUMINOUS : 100LM/W<br>BEAM ANGLE : COB24°<br>IP RATE : IP40<br>BODY : WHITE |



**Burning Life:**  
**30000 Hrs**

## PALM SERIES, COB DOWNLIGHT

|             |                                                                                                                           |
|-------------|---------------------------------------------------------------------------------------------------------------------------|
| POWER       | : 7W, 12W                                                                                                                 |
| CCT         | : 3000K, 4000K                                                                                                            |
| DIAMETER    | : BODY : 59X62MM<br>CUT : 55MM<br>BODY : 85X64MM<br>CUT : 75MM                                                            |
| DESCRIPTION | : COB : BRIDGELUX COB<br>LUMINOUS : 100LM/W<br>BEAM ANGLE : COB24°<br>IP RATE : IP40<br>BODY : WHITE+WHITE<br>BLACK+BLACK |



7Watts  
12Watts

## 2x2 TILE SERIES, LED PANEL LIGHT

|             |                                                                                                   |
|-------------|---------------------------------------------------------------------------------------------------|
| POWER       | : 48W                                                                                             |
| CCT         | : 6500K                                                                                           |
| DIAMETER    | : BODY : 600X600MM<br>CUT : 600MM                                                                 |
| DESCRIPTION | : BRIDGELUX SMD 2835<br>LUMINOUS : 100LM/W<br>BEAM ANGLE : 120°<br>IP RATE : IP40<br>BODY : WHITE |



48Watts





**Burning Life:**  
30000 Hrs

## ZYLO & POINTER SERIES, COB DOWNLIGHT



|             |                                                                                                             |
|-------------|-------------------------------------------------------------------------------------------------------------|
| POWER       | : 7W, 12W                                                                                                   |
| CCT         | : 3000K, 4000K                                                                                              |
| DIAMETER    | : BODY : 42X56MM<br>CUT : 35MM<br>BODY : 54X70MM<br>CUT : 45MM                                              |
| DESCRIPTION | : COB : BRIDGELUX COB<br>LUMINOUS : 100LM/W<br>BEAM ANGLE : COB24°<br>IP RATE : IP40<br>BODY : WHITE, BLACK |

## MOVABLE CYLINDER MOUNTED DOWNLIGHT



|             |                                                                                                                          |
|-------------|--------------------------------------------------------------------------------------------------------------------------|
| POWER       | : 12W                                                                                                                    |
| CCT         | : 3000K, 4000K                                                                                                           |
| DIAMETER    | : BODY : 70X90MM                                                                                                         |
| DESCRIPTION | : BRIDGELUX COB<br>LUMINOUS : 100LM/W<br>BEAM ANGLE : 24°<br>IP RATE : IP40<br>BODY : BLACK+ROSE GOLD<br>BLACK+GUN BLACK |



**Burning Life:**  
30000 Hrs

## RENA SERIES,

- LINEAR DOWNLIGHT
- SURFACE DOWNLIGHT

POWER : LINEAR : 7W, 12W  
SURFACE : 12W

CCT : 4000K

DESCRIPTION: COB : Bridgelux COB  
LUMENS : 110Lm/W  
BEAM ANGLE : 45°  
IP : IP67  
BODY : BLACK  
REFLECTOR : ROSE GOLD,  
GUN BLACK



7Watts  
12Watts

## JAZZ SERIES, MOUNTED DOWN LIGHT

POWER : 12W, 20W  
CCT : 3000K, 4000K

DESCRIPTION: COB: BRIDGELUX COB  
LUMENS : 110Lm/w  
BEAM ANGLE: 30°/45°  
IP : IP67  
VOLTAGE : AC 165-375V  
BODY : BLACK  
REFLECTOR : ROSE GOLD,  
GUN BLACK



12Watts  
20Watts





**Burning Life:**  
30000 Hrs

## RIO SERIES, LINEAR LIGHT

|           |                                                                          |
|-----------|--------------------------------------------------------------------------|
| POWER     | : 3W ,15W                                                                |
| CCT       | : 3000K, 4000K                                                           |
| DIMENSION | : BODY : 45X45X38<br>CUT : 38X35MM<br>BODY : 45X150X38<br>CUT : 138X35MM |

DESCRIPTION: CHIP : Bridgelux CHIP  
LUMENS : 110Lm/W  
BEAM ANGLE : 30°  
IP : IP40  
BODY : WHITE, BLACK



3Watts  
15Watts

## PULLMAN SERIES, LINEAR LIGHT

|           |                                                                                                                |
|-----------|----------------------------------------------------------------------------------------------------------------|
| POWER     | : 5W ,12W, 20W                                                                                                 |
| CCT       | : 3000K, 4000K                                                                                                 |
| DIMENSION | : BODY : 55X55X45<br>CUT : 50X50MM<br>BODY : 130X55X45<br>CUT : 125X50MM<br>BODY : 210X60X55<br>CUT : 205X50MM |

DESCRIPTION: CHIP : Bridgelux 5050 CHIP  
LUMENS : 110Lm/W  
BEAM ANGLE : 38°  
IP : IP40  
BODY : WHITE, BLACK



5Watts  
12Watts  
20Watts





**Burning Life:**  
**30000 Hrs**

## 3W SPOTLIGHTS SERIES

POWER : 3W

CCT : 3000K

DIMENSION : BODY : 35X35MM  
CUT : 30 MM

DESCRIPTION: COB: BRIDGELUX COB  
MATERIAL: ALUMINIUM  
SHAPOR: ROUND  
COLOR: GOLD IN BLACK  
ROSE GOLD, WHITE, BLACK



3Watts



## 3W M-TAL SERIES

POWER : 3W

CCT : 3000K, 4000K

DIMENSION : BODY : 40X40X30MM  
CUT : 30 MM

DESCRIPTION: COB: BRIDGELUX COB  
MATERIAL: ALUMINIUM  
SHAPOR: ROUND  
COLOR: WHITE, BLACK



3Watts



## 3W I-BALL SERIES

POWER : 3W

CCT : 3000K

DIMENSION : BODY : 47 MM  
CUT : 35 MM

DESCRIPTION: COB: BRIDGELUX COB  
MATERIAL: ALUMINIUM  
SHAPOR: ROUND  
COLOR: WHITE, BLACK



3Watts



**Burning Life:**  
**30000 Hrs**

## X1 SPOTLIGHTS SERIES

POWER : 2W  
CCT : 3000K  
DIMENSION : BODY : 29.5X65  
CUT : 25MM

DESCRIPTION: COB: BRIDGELUX COB  
MATERIAL : ALUMINUM  
SHAPE : ROUND



2Watts

## HIGH BAY LIGHT

POWER : 100W/200W  
CCT : 6000K

DESCRIPTION : CHIP : Bridgelux CHIP  
LUMENS : 110lm/W  
BEAM ANGLE : 120°  
IP : IP67  
BODY : ALUMINIUM



100Watts  
200Watts





**Burning Life:**  
**30000 Hrs**

## FUSION SERIES, FLOOD LIGHT

POWER : 60W, 120W, 240W

CCT : 3000, 6000K

DESCRIPTION: CHIP : Bridgelux CHIP  
LUMENS : 110Lm/W  
BEAM ANGLE : 80°  
IP : IP67



60Watts  
120Watts  
240Watts



## FUSION SERIES, FLOOD LIGHT -II

POWER : 50W ,100W, 200W

CCT : 6000K, 3000K

DESCRIPTION: CHIP : 2835 Bridgelux CHIP  
LUMENS : 110Lm/W  
BEAM ANGLE : 120°  
IP : IP67



50Watts  
100Watts  
200Watts





**Burning Life:**  
30000 Hrs

## FLOOD LIGHT

**50w**

### PRODUCT PERFORMANCE

**MATERIAL** - Aluminium

**SHAPE** - Rectangle

**BEAMING ANGLE** - 120°

**BODY COLOR** - Grey

**COLOR** - White, Warm White



## FLOOD LIGHT

**100w**

**MATERIAL** - Aluminium

**SHAPE** - Rectangle

**BEAMING ANGLE** - 120°

**BODY COLOR** - Grey

**COLOR** - White, Warm White





**Burning Life:**  
30000 Hrs

## RIBBON LED STRIP LIGHT

|                      |                      |       |                   |          |
|----------------------|----------------------|-------|-------------------|----------|
| 20 lumens<br>per LED | 120 LED's<br>per mtr | IP 20 | 2835 SMD<br>Strip | 5MM, 8MM |
|----------------------|----------------------|-------|-------------------|----------|

### APPLICATIONS:

- Gallery
- Lounges
- Residences
- Cove Lighting
- Decorative Lighting
- Profile Lighting

### COLOURS

|                                                                                           |                                                                                           |                                                                                           |
|-------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|
|  3000k |  4000k |  6000k |
|  BLUE  |  RED   |  GREEN |
|                                                                                           |                                                                                           |  PINK  |



## RIBBON LED STRIP LIGHT

|                      |                      |       |                   |      |
|----------------------|----------------------|-------|-------------------|------|
| 20 lumens<br>per LED | 240 LED's<br>per mtr | IP 20 | 2835 SMD<br>Strip | 10MM |
|----------------------|----------------------|-------|-------------------|------|

### APPLICATIONS:

- Gallery
- Lounges
- Residences
- Cove Lighting
- Decorative Lighting
- Profile Lighting

### COLOURS

|                                                                                             |                                                                                             |                                                                                             |
|---------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|
|  3000k |  4000k |  6000k |
|  BLUE  |  RED   |  GREEN |
|                                                                                             |                                                                                             |  PINK  |







Burning Life:  
30000 Hrs

SMPS PRO SERIES  
POWER SUPPLY

| POWER | AC INPUT  | OUTPUT VOLTAGE | DIMENSION     |
|-------|-----------|----------------|---------------|
| 60W   | 176V~264V | 12V 5A         | 114x49.5x22mm |
| 120W  | 176V~264V | 12V 10A        | 134x49.5x22mm |
| 150W  | 176V~264V | 12V 12.5A      | 178x49.5x22mm |
| 200W  | 176V~264V | 12V 16.7A      | 178x49.5x22mm |
| 250W  | 176V~264V | 12V 20A        | 178x49.5x22mm |
| 300W  | 176V~264V | 12V25A         | 205x49.5x22mm |
| 400W  | 176V~264V | 12V33.3A       | 238x49.5x22mm |

SMPS NEW SERIES

| POWER | AC INPUT  | OUTPUT VOLTAGE | DIMENSION   |
|-------|-----------|----------------|-------------|
| 60W   | 176V~264V | 12V 5A         | 92x50x22mm  |
| 120W  | 176V~264V | 12V 10A        | 130x50x24mm |

SMPS 24V/48V SERIES

| POWER | AC INPUT  | OUTPUT VOLTAGE | DIMENSION   |
|-------|-----------|----------------|-------------|
| 240W  | 176V~264V | 24V 10A        | 178x50x22mm |
| 100W  | 180V~265V | 48V 2.08A      | 180x25x20mm |
| 200W  | 180V~265V | 48V 4.16A      | 250x25x20mm |

LED ROPE LIGHT

- PRO SERIES
  - NEW SERIES

50

mtrs.

PRODUCT PERFORMANCE

2835 SMD - 120 LED PER MTR.

IP67, 10W PER MTR.

24-26 LUMENS PER LED







**Burning Life:**  
**30000 Hrs**

## UP AND DOWN SERIES, OUTDOOR LIGHTS



| POWER | CCT   | DIMENSION |
|-------|-------|-----------|
| 2*1W  | 3000k | 75X75X40  |
| 4*1W  | 3000k | 110X75X40 |
| 6*1W  | 3000k | 170X75X50 |
| 8*1W  | 3000k | 210X75X50 |
| 10*1W | 3000k | 270X80X50 |

### PRODUCT PERFORMANCE

- Aluminium Housing
- Outdoor Application
- Beam Angle 60 with Lens
- Wall Mounted
- Decorative Lighting to create Facade



## K SERIES, OUTDOOR LIGHT

POWER : 3W – Half K

2X3W – Full K

CCT : 3000K

### PRODUCT PERFORMANCE

- Aluminium Housing
- Outdoor Application
- Beautiful Facade
- Wall Mounted
- Decorative Lighting to Create





**Burning Life:**  
30000 Hrs

## FOOT LIGHT SERIES

POWER : 3W

CCT : 3000K

### PRODUCT PERFORMANCE

- Aluminium Housing
- Outdoor Application
- Beautiful Facade
- Wall Mounted
- Decorative Lighting to Create



## PARAMETERS

MODEL NO : 3301

POWER : 10W

CCT : 3000K

SIZE : 165X165MM

### PRODUCT PERFORMANCE

- Aluminium Housing
- Outdoor Application
- Beautiful Facade
- Wall Mounted
- Decorative Lighting to Create



**Burning Life:**  
**30000 Hrs**

## PARAMETERS

MODEL NO : 3306  
CCT : 3000K  
LED SOURCE : SMD  
SIZE : 220X90X150MM

### PRODUCT PERFORMANCE

- Aluminium Housing
- Outdoor Application
- Beautiful Facade
- Wall Mounted
- Decorative Lighting to Create



## PARAMETERS

MODEL NO : 3308  
POWER : 10W  
CCT : 3000K  
SIZE : 220X160X50MM

### PRODUCT PERFORMANCE

- Aluminium Housing
- Outdoor Application
- Beautiful Facade
- Wall Mounted
- Decorative Lighting to Create




**Burning Life:**  
**30000 Hrs**

## PARAMETERS

MODEL NO : 2286  
POWER : 12W  
CCT : 3000K  
SIZE : 160X130X75MM

### PRODUCT PERFORMANCE

- Aluminium Housing
- Outdoor Application
- Beautiful Facade
- Wall Mounted
- Decorative Lighting to Create




## PARAMETERS

MODEL NO : 3607  
POWER : 12W  
CCT : 3000K  
SIZE : 120X130X145MM

### PRODUCT PERFORMANCE

- Aluminium Housing
- Outdoor Application
- Beautiful Facade
- Wall Mounted
- Decorative Lighting to Create





**Burning Life:**  
30000 Hrs

## PARAMETERS

MODEL NO : 3101C  
POWER : 12W  
CCT : 3000K  
SIZE : 138X50MM

### PRODUCT PERFORMANCE

- Aluminium Housing
- Outdoor Application
- Beautiful Facade
- Wall Mounted
- Decorative Lighting to Create



## PARAMETERS

MODEL NO : 2040  
POWER : 12W  
CCT : 3000K  
SIZE : 200X200X600MM

### PRODUCT PERFORMANCE

- Aluminium Housing
- Outdoor Application
- Beautiful Facade
- Wall Mounted
- Decorative Lighting to Create



**Burning Life:**  
30000 Hrs

## PARAMETERS

MODEL NO : 2017  
POWER : 12W  
CCT : 3000K  
SIZE : 170X120X600MM

### PRODUCT PERFORMANCE

- Aluminium Housing
- Outdoor Application
- Beautiful Facade
- Wall Mounted
- Decorative Lighting to Create




## OUTDOORS WATERPROOF GARDEN LAMP

MODEL NO : 2019  
POWER : 12W  
CCT : 3000K  
SIZE : 163X60X600MM

### PRODUCT PERFORMANCE

- Aluminium Housing
- Outdoor Application
- Beautiful Facade
- Wall Mounted
- Decorative Lighting to Create



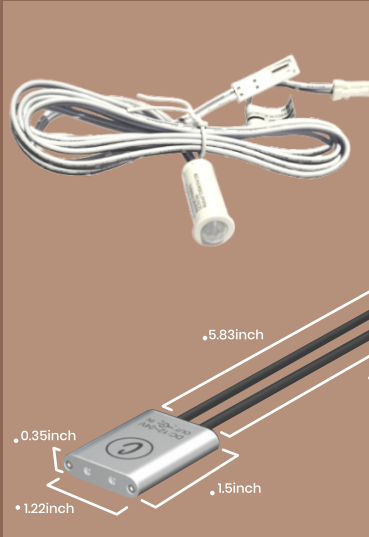

## IR SENSOR

### PRODUCT SPECIFICATION

- VOLTAGE- 12/24V DC
- WATTAGE- 12v-50W / 24v- 120W

### PRODUCT SPECIFICATION

- Switch Type: Cabinet IR Sensor Switch
- Input voltage: DC12V /DC24V
- Max Iad current: 3A
- Power: DC12V 36 W/ DC24V 72 W
- Output voltage: DC12V / DC24V
- Connector: 5.5\*2.1mm DC connector
- Cable Length: input cable 8.19inch, output cable 5.83inch

## WARDROBE SWITCH SENSOR

This switch is great for using on doors, light turns off when door is close and switch is pushed in.

### PRODUCT SPECIFICATION

|                     |                                                       |
|---------------------|-------------------------------------------------------|
| Power Sourcing      | : 220V/AC-240V/AC                                     |
| Power Frequency     | : 50Hz                                                |
| Working Temperature | : -20~+40                                             |
| Ambient Light       | : 3-2000LUX (Adjustable)                              |
| Working Humidity    | : <93%RH                                              |
| Power Consumption:  | : 0.45W (work) 0.1W (static)                          |
| Rated Load          | : 1200W (incandescent lamp) 300W (energy-saving lamp) |



FS-RT500

## INFRARED MOTION HUMAN BODY SENSOR

### TECHNICAL SPECIFICATIONS

Input Voltage : 220-240VAC  
Sensing Ambient Brightness : 3 ~ 2000 lux (adjustable)  
Delay Time : 10s-30s-90s-5min-10min-30min  
Incandescent lamp : 1200W / LED 500W  
Installation Height : 2.5m-3.5m  
Detection Distance : 0.5m/6m max  
Detection angle : 360°  
Moving Speed : 0.6~1.5m/s  
Server power consumption : 0.5W



FS-RLD522

## MICROWAVE RADAR SENSOR

### TECHNICAL SPECIFICATIONS

Input Voltage : 220-240VAC  
Sensing Ambient Brightness : 3 ~ 2000 lux (adjustable)  
Delay Time : 8s - 12min  
Incandescent lamp : 1200W / LED 500W  
Installation Height : 2.5m-3.5m  
Detection Distance : 0.5m/6m max  
Detection angle : 360°  
Moving Speed : 0.6~1.5m/s  
Server power consumption : 0.5W



Surface  
Mounted


## OCCUPANCY SENSOR

### PRODUCT SPECIFICATION

|                        |                                                       |
|------------------------|-------------------------------------------------------|
| Power Sourcing         | : 220V/AC-240V/AC                                     |
| Power Frequency        | : 50Hz                                                |
| Working Temperature    | : -20~+40                                             |
| Ambient Light          | : 3-2000LUX (Adjustable)                              |
| Working Humidity       | : <93%RH                                              |
| Time-Delay             | : min:10sec±3sec max:7min±2m                          |
| Installing Height      | : 2.2m-4m                                             |
| Power Consumption:     | : 0.45W (work) 0.1W (static)                          |
| Detection Distance     | : 3-6m                                                |
| Rated Load             | : 1200W (incandescent lamp) 300W (energy-saving lamp) |
| Detection Motion Speed | : 0.6-1.5m/s                                          |





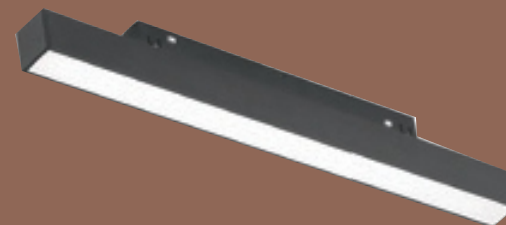

**48V**

## M20 PROFILE

CCT



4000K

CRI  
Ra≥90

Input  
AC90-300V

| POWER | FLUX   | PF   | SIZE           |
|-------|--------|------|----------------|
| 10W   | 1000Lm | ≥0.9 | L300*W22*H25MM |
| 20W   | 2000Lm | ≥0.9 | L600*W22*H25MM |



## M20 LINEAR

| POWER | FLUX   | PF   | SIZE           |
|-------|--------|------|----------------|
| 6W    | 600Lm  | ≥0.9 | L112*W22*H25MM |
| 12W   | 1200Lm | ≥0.9 | L220*W22*H25MM |

CCT



4000K

CRI  
Ra≥90

Input  
AC90-300V



Hotels



Residential



Offices



Malls



**48V**





## M20 FOLDING



**48V**

| POWER | FLUX   | PF   | SIZE            |
|-------|--------|------|-----------------|
| 6W    | 600Lm  | ≥0.9 | L135*W22*H100MM |
| 12W   | 1200Lm | ≥0.9 | L230*W22*H100MM |

CCT




4000K

CRI

Ra≥90

Input

AC90-300V



## M20 TRACK

**48V**

| POWER | FLUX   | PF   | SIZE       |
|-------|--------|------|------------|
| 10W   | 1000Lm | ≥0.9 | W45*H100MM |
| 18W   | 1800Lm | ≥0.9 | W65*H100MM |

CCT



4000K

CRI

Ra≥90

Input

AC90-300V



Hotels



Residential



Offices




Malls




IP40

## M20 MAGNETIC DRIVER

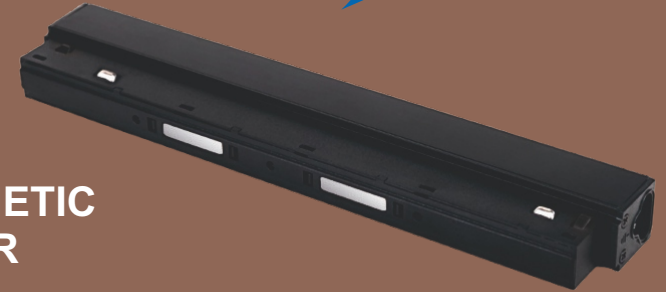

| POWER | INPUT    | OUTPUT   | DIMENSIONS   |
|-------|----------|----------|--------------|
| 100W  | 180-265V | 48V 100W | 180*20*25 MM |
| 200W  | 180-265V | 48V 200W | 250*20*25 MM |

**48V**

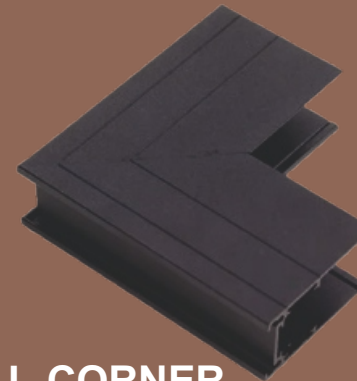

## L-CORNER 80\*80 MM



## L-CONNECTOR 95\*17\*17 MM



## I-CONNECTOR 126\*17\*17 MM

**48V**



Hotels



Residential




Offices



Malls



IP40

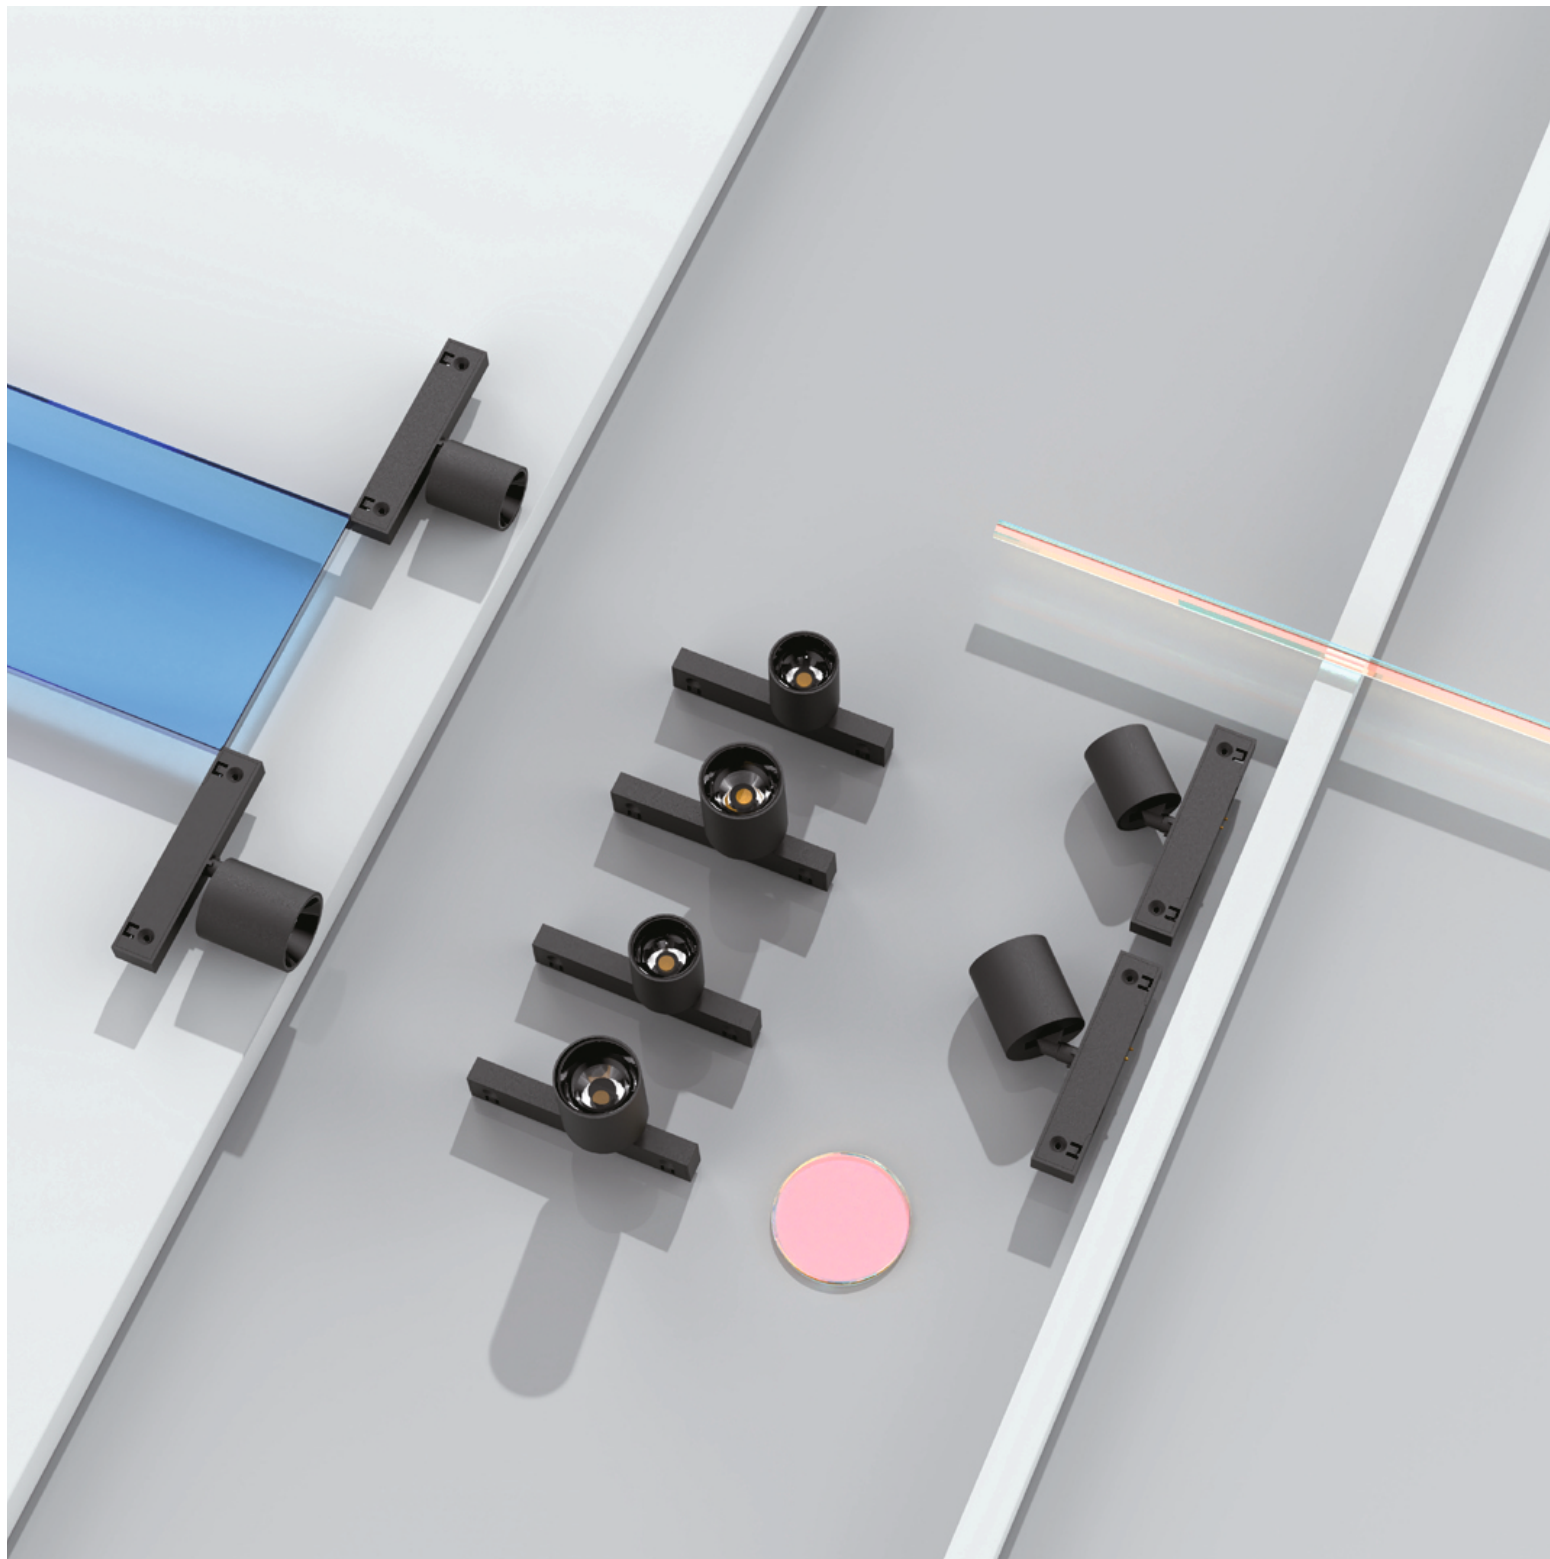

# M10 Series

**Magnetic  
Track lighting** (Thickness : 2.5mm)

- Profile Light (8W,16W)
- Foldable Grille Light (10W)
- Grille Light (10W,15W)
- Track Light (1\*3W,2\*3W,9W,10W)
- Spot Light (3W)
- Pendant Light (3W)
- Track Bar (L2000\*W45\*H23mm)
- Connector
- Power Supply

