



ABOUT US

- For over four decades, Fischer has been at the forefront of the electrical industry, introducing the very best that technology has to offer in the world of wiring devices. Our products not only understood your present needs, but some, even your future ones. Developed using processes that have been refined over the years, our products made you smile with joy and satisfaction.
- The story of creating innovative, high-quality products continues in the field of LED manufacturing. We guarantee, that like every product that we manufacture, the LEDs we make are innovative, aesthetically pleasing, and energy efficient along with being easy to maintain and replace. As always, we continue to focus on delivering customer delight through value for money product and reliable service, each and every time.
- We welcome you to witness the exciting developments in the world of LEDs by Fischer. It your imagination come true.

INDEX

WOVEN MAGNETIC TRACK	
PC PANEL	
TRACK LIGHT	
DEEP DOWN LIGHT	
COB DOWN LIGHT	
SPOT LIGHT	
GOLD SERIES	
2x2 TILE LIGHT	
CYLINDERS	
LINEAR LIGHT	
HIGH BAY LIGHT	
FLOOD LIGHT	
STRIPS	
POWER SUPPLY	
ROPE LIGHT	
OUTDOOR LIGHTS	
SENSOR	
MAGNETIC LIGHT	



ULTRA THIN LINEAR TRACK



WOVEN TRACK



WOVEN TRACK | ULTRA THIN LINEAR TRACK | FULL RANGE OF LAMPS

48V PRODUCT DISPLAY

The whole series of rails and lamps can be freely matched to make the lighting space more flexible.



8Watts
15Watts
22Watts

PC PLASTIC PANEL

POWER : 8W, 15W, 22W

CCT : 4000K, 6000K

DIAMETER : 4INCH, 6INCH, 8 INCH

DESCRIPTION: 2835 Bridgelux SMD LED
LUMENS : 110Lm/W
SHAPE : SQUARE, ROUND
BODY : WHITE



8Watts
18Watts
24Watts

PC SURFACE

POWER : 8W, 18W, 24W

CCT : 4000K, 6000K

DIAMETER : 4 INCH, 6 INCH, 8 INCH

DESCRIPTION: 2835 Bridgelux SMD LED
LUMENS : 110Lm/W
SHAPE : ROUND
BODY : WHITE



CONCEALED LIGHT

POWER : 9W
CCT : 4000K, 6000K, 3 IN ONE
DIAMETER : 3 INCH
DESCRIPTION: 2835 Bridgelux SMD LED
LUMENS : 110Lm/W
SHAPE : ROUND
BODY : WHITE



9Watts

Burning Life:
30000 Hrs

TRACKO SERIES, TRACK LIGHT

POWER : 12W , 24W, 36W
CCT : 3000K, 4000K, 6000K,
3in one
DESCRIPTION: COB: BRIDGELUX COB
LUMENS :110Lm/w
BEAM ANGLE: 24°
IP : IP40
BODY : WHITE, BLACK



COB LIGHT

12Watts
24Watts
36Watts



Burning Life:

30000 Hrs

AURA SERIES,

DOWN LIGHT PANEL

POWER

: 12W, 18W

CCT

: 4000K, 6000K

DIAMETER

: Body : 91X45mm
Cut : 80mm
Body : 150X53mm
Cut : 92mm

DESCRIPTION

: 2835 Bridgelux SMD LED
LUMENS : 110Lm/W
Beam Angle : 60°
IP Rate : IP40
BODY : BLACK, WHITE



12Watts

18Watts

Super Heavy Aluminum Housing

WOLF SERIES,

DEEP DOWN LIGHT PANEL

POWER

: 12W, 18W

CCT

: 4000K, 6000K

DIAMETER

: Body : 120X40mm
Cut : 105mm
Body : 145X40mm
Cut : 130mm

DESCRIPTION

: 2835 Bridgelux SMD LED
LUMENS : 110Lm/W
Beam Angle : 60°
IP Rate : IP40
BODY : BLACK, WHITE



12Watts

18Watts



Burning Life:
30000 Hrs

RUSH SERIES, COB DOWNLIGHT

POWER	: 7W, 12W, 18W
CCT	: 3000K, 4000K, 6000K
DIAMETER	: Body : 65X60mm Cut : 65mm Body : 75X85mm Cut : 75mm Body : 95X95mm Cut : 85mm

DESCRIPTION	: COB : BRIDGELUX COB Luminous : 110Lm/W Beam Angle : 24° IP Rate : IP40 BODY : BLACK, WHITE REFLECTOR : ROSE GOLD, GUN BLACK
-------------	---

7Watts
12Watts
18Watts

FOX SERIES, COB DOWN LIGHT

POWER	: 12W
CCT	: 3000K, 4000K, 3 IN ONE
DIAMETER	: Body : 45X87mm Cut : 80mm

DESCRIPTION	: COB : BRIDGELUX COB Luminous : 110Lm/W Beam Angle : 24° IP Rate : IP40 BODY : BLACK, WHITE REFLECTOR : ROSE GOLD, GUN BLACK
-------------	---

12Watts



Burning Life:
30000 Hrs

PABLO SERIES, SPOT LIGHT

POWER	: 7W,12W
CCT	: 3000K, 4000K
DIMENSION	: BODY : 63X52 CUT : 55MM BODY : 85X64 CUT : 75 MM
DESCRIPTION	: COB: BRIDGELUX COB LUMEN : 110Lm/W BEAM ANGLE : 24°, 36° IP : IP40 BODY : WHITE, BLACK REFLECTOR : GUN BLACK



OMEN SERIES, SPOT LIGHT

POWER	: 7W, 12W
CCT	: 3000, 4000K 3 IN ONE
DIMENSION	: BODY : 62X78 CUT : 55 MM BODY : 72X78 CUT : 65 MM
DESCRIPTION	: COB: BRIDGELUX COB LUMEN : 110Lm/W BEAM ANGLE : 30° IP : IP40 BODY : WHITE, BLACK





Burning Life:
30000 Hrs

CLASSIC SERIES, SPOT LIGHT

POWER : 7W, 12W

CCT : 3000K, 4000K

DIMENSION : BODY : 75X40
CUT : 75MM
BODY : 85X50
CUT : 85MM

DESCRIPTION: COB : Bridgelux COB
LUMENS : 110Lm/W
BEAM ANGLE : 30°
IP : IP40
BODY : WHITE, BLACK



7Watts
12Watts

PLATINUM SERIES SPOT LIGHT

POWER : 12W

CCT : 3000K, 4000K

DIMENSION : BODY : 80X48
CUT : 75MM

DESCRIPTION: COB : Bridgelux COB
LUMENS : 110Lm/W
BEAM ANGLE : 38°
IP : IP40
BODY : WHITE, BLACK
BRASS



12Watts



Burning Life:
30000 Hrs

CLASSIC PRO SPOT LIGHT

POWER : 12W
CCT : 3000K, 4000K
DIMENSION : BODY : 40X90
CUT : 75MM X 85MM

DESCRIPTION: COB : BRIDGELUX COB
LUMEN : 110Lm/W
BEAM ANGLE : 40°
IP: IP40
BODY : WHITE, BLACK




12Watts

UNIK SERIES DOWN LIGHT

POWER : 12W
CCT : 3000K, 4000K
DIMENSION : BODY : 50X85
CUT : 75MM

DESCRIPTION: CHIP : BRIDGELUX CHIP
LUMEN : 110Lm/W
BEAM ANGLE : 40°
IP: IP40
BODY : WHITE, BLACK

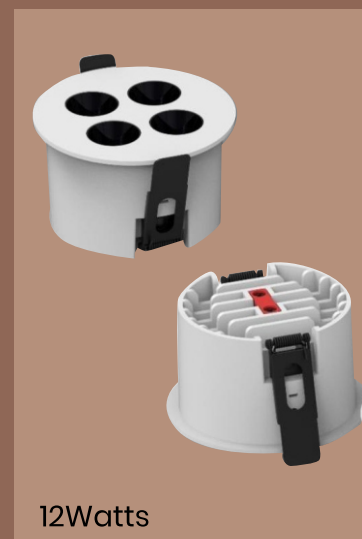

12Watts



Burning Life:
30000 Hrs

GIVA SERIES, SPOT LIGHT

POWER	: 7W, 12W
CCT	: 3000K, 4000K
DIMENSION	: BODY : 65X85 CUT : 55MM BODY : 85X85 CUT : 75 MM

DESCRIPTION: COB : BRIDGELUX COB
LUMENS : 110Lm/w
BEAM ANGLE : 36°
IP : IP40
BODY : WHITE



7Watts
12Watts

MATRIX SERIES, SPOT LIGHT

POWER	: 7W, 12W
CCT	: 3000K, 4000K
DIMENSION	: BODY : 160X90 CUT : 55MM BODY : 160X110 CUT : 75MM

DESCRIPTION: COB : BRIDGELUX COB
LUMENS : 110Lm/w
BEAM ANGLE : 38°
IP : IP40
BODY : WHITE, GREY



7Watts
12Watts



Burning Life:
30000 Hrs

SLEEK SERIES, SPOT LIGHT

POWER : 10W
CCT : 3000K, 4000K
DIMENSION : BODY : 35X85
CUT : 75MM

DESCRIPTION: COB : BRIDGELUX COB
LUMENS : 110Lm/w
BEAM ANGLE : 38°
IP : IP40
BODY : WHITE
REFLECTOR : GUN BLACK



10Watts

GOLD SERIES, DOWN LIGHT

POWER : 30W ,50W
CCT : 3000K
DIMENSION : BODY : 160X90MM
CUT : 145MM
BODY : 160X110
CUT : 145MM

DESCRIPTION: COB: BRIDGELUX COB
LUMENS :110Lm/w
BEAM ANGLE: 38°
IP : IP40
BODY : WHITE



30Watts
50Watts



Burning Life:
30000 Hrs

HEXA SERIES, • COB DOWNLIGHT • PANEL DOWNLIGHT



12Watts

POWER	: 12W
CCT	: 3000K, 4000K, 600K
DIAMETER	: BODY : 64X85MM CUT : 75MM
DESCRIPTION	: COB : BRIDGELUX COB LUMINOUS : 100LM/W BEAM ANGLE : COB24° SMD120° IP RATE : IP40 BODY : WHITE+WHITE WHITE+BLACK

FOCUS SERIES, COB DOWN LIGHT



12Watts
20Watts

POWER	: 12W, 20W
CCT	: 3000K, 4000K
DIAMETER	: BODY : 90X90MM CUT : 80MM BODY : 110X110MM CUT : 100MM
DESCRIPTION	: COB : BRIDGELUX COB LUMINOUS : 100LM/W BEAM ANGLE : COB24° IP RATE : IP40 BODY : WHITE



Burning Life:
30000 Hrs

PALM SERIES, COB DOWNLIGHT

POWER	: 7W, 12W
CCT	: 3000K, 4000K
DIAMETER	: BODY : 59X62MM CUT : 55MM BODY : 85X64MM CUT : 75MM
DESCRIPTION	: COB : BRIDGELUX COB LUMINOUS : 100LM/W BEAM ANGLE : COB24° IP RATE : IP40 BODY : WHITE+WHITE BLACK+BLACK



7Watts
12Watts

2x2 TILE SERIES, LED PANEL LIGHT

POWER	: 48W
CCT	: 6500K
DIAMETER	: BODY : 600X600MM CUT : 600MM
DESCRIPTION	: BRIDGELUX SMD 2835 LUMINOUS : 100LM/W BEAM ANGLE : 120° IP RATE : IP40 BODY : WHITE



48Watts



Burning Life:
30000 Hrs

ZYLO & POINTER SERIES, COB DOWNLIGHT



POWER	: 7W, 12W
CCT	: 3000K, 4000K
DIAMETER	: BODY : 42X56MM CUT : 35MM BODY : 54X70MM CUT : 45MM
DESCRIPTION	: COB : BRIDGELUX COB LUMINOUS : 100LM/W BEAM ANGLE : COB24° IP RATE : IP40 BODY : WHITE, BLACK

MOVABLE CYLINDER MOUNTED DOWNLIGHT



POWER	: 12W
CCT	: 3000K, 4000K
DIAMETER	: BODY : 70X90MM
DESCRIPTION	: BRIDGELUX COB LUMINOUS : 100LM/W BEAM ANGLE : 24° IP RATE : IP40 BODY : BLACK+ROSE GOLD BLACK+GUN BLACK



Burning Life:
30000 Hrs

RENA SERIES,

- LINEAR DOWNLIGHT
- SURFACE DOWNLIGHT

POWER : LINEAR : 7W, 12W
SURFACE : 12W

CCT : 4000K

DESCRIPTION: COB : Bridgelux COB
LUMENS : 110Lm/W
BEAM ANGLE : 45°
IP : IP67
BODY : BLACK
REFLECTOR : ROSE GOLD,
GUN BLACK



7Watts
12Watts

JAZZ SERIES, MOUNTED DOWN LIGHT

POWER : 12W, 20W
CCT : 3000K, 4000K

DESCRIPTION: COB: BRIDGELUX COB
LUMENS : 110Lm/w
BEAM ANGLE: 30°/45°
IP : IP67
VOLTAGE : AC 165-375V
BODY : BLACK
REFLECTOR : ROSE GOLD,
GUN BLACK



12Watts
20Watts



Burning Life:
30000 Hrs

RIO SERIES, LINEAR LIGHT

POWER	: 3W ,15W
CCT	: 3000K, 4000K
DIMENSION	: BODY : 45X45X38 CUT : 38X35MM BODY : 45X150X38 CUT : 138X35MM

DESCRIPTION: CHIP : Bridgelux CHIP
LUMENS : 110Lm/W
BEAM ANGLE : 30°
IP : IP40
BODY : WHITE, BLACK



3Watts
15Watts

PULLMAN SERIES, LINEAR LIGHT

POWER	: 5W ,12W, 20W
CCT	: 3000K, 4000K
DIMENSION	: BODY : 55X55X45 CUT : 50X50MM BODY : 130X55X45 CUT : 125X50MM BODY : 210X60X55 CUT : 205X50MM

DESCRIPTION: CHIP : Bridgelux 5050 CHIP
LUMENS : 110Lm/W
BEAM ANGLE : 38°
IP : IP40
BODY : WHITE, BLACK



5Watts
12Watts
20Watts



Burning Life:
30000 Hrs

3W SPOTLIGHTS SERIES

POWER : 3W

CCT : 3000K

DIMENSION : BODY : 35X35MM
CUT : 30 MM

DESCRIPTION: COB: BRIDGELUX COB
MATERIAL: ALUMINIUM
SHAPOR: ROUND
COLOR: GOLD IN BLACK
ROSE GOLD, WHITE, BLACK



3Watts



3W M-TAL SERIES

POWER : 3W

CCT : 3000K, 4000K

DIMENSION : BODY : 40X40X30MM
CUT : 30 MM

DESCRIPTION: COB: BRIDGELUX COB
MATERIAL: ALUMINIUM
SHAPOR: ROUND
COLOR: WHITE, BLACK



3Watts



3W I-BALL SERIES

POWER : 3W

CCT : 3000K

DIMENSION : BODY : 47 MM
CUT : 35 MM

DESCRIPTION: COB: BRIDGELUX COB
MATERIAL: ALUMINIUM
SHAPOR: ROUND
COLOR: WHITE, BLACK



3Watts



Burning Life:
30000 Hrs

X1 SPOTLIGHTS SERIES

POWER	: 2W
CCT	: 3000K
DIMENSION	: BODY : 29.5X65 CUT : 25MM

DESCRIPTION: COB: BRIDGELUX COB
MATERIAL : ALUMINUM
SHAPE : ROUND



2Watts

HIGH BAY LIGHT

POWER	: 100W/200W
CCT	: 6000K

DESCRIPTION : CHIP : Bridgelux CHIP
LUMENS : 110lm/W
BEAM ANGLE : 120°
IP : IP67
BODY : ALUMINIUM



100Watts
200Watts



Burning Life:
30000 Hrs

FUSION SERIES, FLOOD LIGHT

POWER : 60W, 120W, 240W

CCT : 3000, 6000K

DESCRIPTION: CHIP : Bridgelux CHIP
LUMENS : 110Lm/W
BEAM ANGLE : 80°
IP : IP67



60Watts
120Watts
240Watts



FUSION SERIES, FLOOD LIGHT -II

POWER : 50W, 100W, 200W

CCT : 6000K, 3000K

DESCRIPTION: CHIP : 2835 Bridgelux CHIP
LUMENS : 110Lm/W
BEAM ANGLE : 120°
IP : IP67



50Watts
100Watts
200Watts



Burning Life:
30000 Hrs

FLOOD LIGHT

50w

PRODUCT PERFORMANCE

MATERIAL - Aluminium

SHAPE - Rectangle

BEAMING ANGLE - 120°

BODY COLOR - Grey

COLOR - White, Warm White



FLOOD LIGHT

100w

MATERIAL - Aluminium

SHAPE - Rectangle

BEAMING ANGLE - 120°

BODY COLOR - Grey

COLOR - White, Warm White





Burning Life:
30000 Hrs

RIBBON LED STRIP LIGHT

20 lumens per LED	120 LED's per mtr	IP 20	2835 SMD Strip	5MM, 8MM
----------------------	----------------------	-------	-------------------	----------

APPLICATIONS:

- Gallery
- Lounges
- Residences
- Cove Lighting
- Decorative Lighting
- Profile Lighting

COLOURS

 3000k	 4000k	 6000k
 BLUE	 RED	 GREEN
		 PINK



RIBBON LED STRIP LIGHT

20 lumens per LED	240 LED's per mtr	IP 20	2835 SMD Strip	10MM
----------------------	----------------------	-------	-------------------	------

APPLICATIONS:

- Gallery
- Lounges
- Residences
- Cove Lighting
- Decorative Lighting
- Profile Lighting

COLOURS


 3000k	 4000k	 6000k
 BLUE	 RED	 GREEN
		 PINK





Burning Life:
30000 Hrs

SMPS PRO SERIES POWER SUPPLY

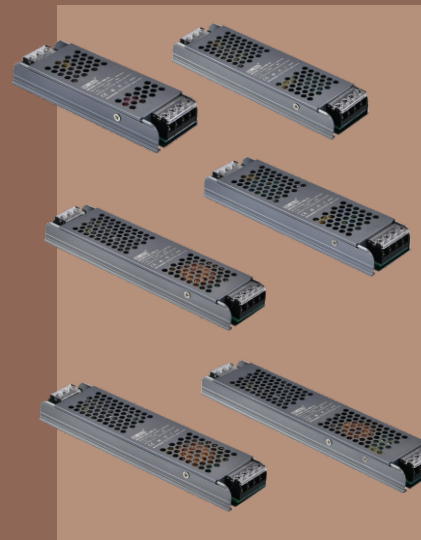

POWER	AC INPUT	OUTPUT VOLTAGE	DIMENSION
60W	176V~264V	12V 5A	114x49.5x22mm
120W	176V~264V	12V 10A	134x49.5x22mm
150W	176V~264V	12V 12.5A	178x49.5x22mm
200W	176V~264V	12V 16.7A	178x49.5x22mm
250W	176V~264V	12V 20A	178x49.5x22mm
300W	176V~264V	12V 25A	205x49.5x22mm
400W	176V~264V	12V 33.3A	238x49.5x22mm

SMPS NEW SERIES

POWER	AC INPUT	OUTPUT VOLTAGE	DIMENSION
60W	176V~264V	12V 5A	92x50x22mm
120W	176V~264V	12V 10A	130x50x24mm

SMPS 24V/48V SERIES

POWER	AC INPUT	OUTPUT VOLTAGE	DIMENSION
240W	176V~264V	24V 10A	178x50x22mm
100W	180V~265V	48V 2.08A	180x25x20mm
200W	180V~265V	48V 4.16A	250x25x20mm



LED ROPE LIGHT

- PRO SERIES
- NEW SERIES

50
mtrs.

PRODUCT PERFORMANCE
2835 SMD - 120 LED PER MTR.
IP67, 10W PER MTR.
24-26 LUMENS PER LED





Burning Life:
30000 Hrs

UP AND DOWN SERIES, OUTDOOR LIGHTS



POWER	CCT	DIMENSION
2*1W	3000k	75X75X40
4*1W	3000k	110X75X40
6*1W	3000k	170X75X50
8*1W	3000k	210X75X50
10*1W	3000k	270X80X50

PRODUCT PERFORMANCE

- Aluminium Housing
- Outdoor Application
- Beam Angle 60 with Lens
- Wall Mounted
- Decorative Lighting to create Facade

K SERIES, OUTDOOR LIGHT



POWER	:	3W – Half K
		2X3W – Full K
CCT	:	3000K

PRODUCT PERFORMANCE

- Aluminium Housing
- Outdoor Application
- Beautiful Facade
- Wall Mounted
- Decorative Lighting to Create



Burning Life:
30000 Hrs

FOOT LIGHT SERIES

POWER : 3W
CCT : 3000K

PRODUCT PERFORMANCE

- Aluminium Housing
- Outdoor Application
- Beautiful Facade
- Wall Mounted
- Decorative Lighting to Create



PARAMETERS

MODEL NO : 3301
POWER : 10W
CCT : 3000K
SIZE : 165X165MM

PRODUCT PERFORMANCE

- Aluminium Housing
- Outdoor Application
- Beautiful Facade
- Wall Mounted
- Decorative Lighting to Create



Burning Life:
30000 Hrs

PARAMETERS

MODEL NO : 3306
CCT : 3000K
LED SOURCE : SMD
SIZE : 220X90X150MM

PRODUCT PERFORMANCE

- Aluminium Housing
- Outdoor Application
- Beautiful Facade
- Wall Mounted
- Decorative Lighting to Create



PARAMETERS

MODEL NO : 3308
POWER : 10W
CCT : 3000K
SIZE : 220X160X50MM

PRODUCT PERFORMANCE

- Aluminium Housing
- Outdoor Application
- Beautiful Facade
- Wall Mounted
- Decorative Lighting to Create



Burning Life:
30000 Hrs

PARAMETERS

MODEL NO : 2286
POWER : 12W
CCT : 3000K
SIZE : 160X130X75MM

PRODUCT PERFORMANCE

- Aluminium Housing
- Outdoor Application
- Beautiful Facade
- Wall Mounted
- Decorative Lighting to Create




PARAMETERS

MODEL NO : 3607
POWER : 12W
CCT : 3000K
SIZE : 120X130X145MM

PRODUCT PERFORMANCE

- Aluminium Housing
- Outdoor Application
- Beautiful Facade
- Wall Mounted
- Decorative Lighting to Create



Burning Life:
30000 Hrs

PARAMETERS

MODEL NO : 3101C
POWER : 12W
CCT : 3000K
SIZE : 138X50MM

PRODUCT PERFORMANCE

- Aluminium Housing
- Outdoor Application
- Beautiful Facade
- Wall Mounted
- Decorative Lighting to Create



PARAMETERS

MODEL NO : 2040
POWER : 12W
CCT : 3000K
SIZE : 200X200X600MM

PRODUCT PERFORMANCE

- Aluminium Housing
- Outdoor Application
- Beautiful Facade
- Wall Mounted
- Decorative Lighting to Create



Burning Life:
30000 Hrs

PARAMETERS

MODEL NO : 2017
POWER : 12W
CCT : 3000K
SIZE : 170X120X600MM

PRODUCT PERFORMANCE

- Aluminium Housing
- Outdoor Application
- Beautiful Facade
- Wall Mounted
- Decorative Lighting to Create



OUTDOORS WATERPROOF GARDEN LAMP

MODEL NO : 2019
POWER : 12W
CCT : 3000K
SIZE : 163X60X600MM

PRODUCT PERFORMANCE

- Aluminium Housing
- Outdoor Application
- Beautiful Facade
- Wall Mounted
- Decorative Lighting to Create






IR SENSOR

PRODUCT SPECIFICATION

- VOLTAGE- 12/24V DC
- WATTAGE- 12v-50W / 24v- 120W

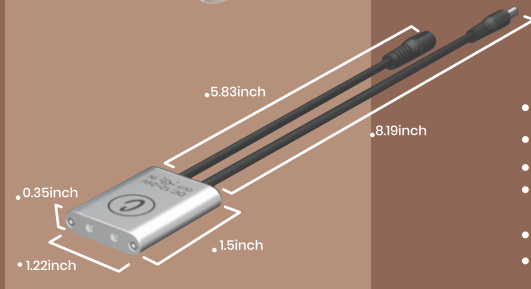

PRODUCT SPECIFICATION

- Switch Type: Cabinet IR Sensor Switch
- Input voltage: DC12V /DC24V
- Max Iad current: 3A
- Power: DC12V 36 W/ DC24V 72 W
- Output voltage: DC12V / DC24V
- Connector: 5.5*2.1mm DC connector
- Cable Length: input cable 8.19inch, output cable 5.83inch

WARDROBE SWITCH SENSOR

This switch is great for using on doors, light turns off when door is close and switch is pushed in.



PRODUCT SPECIFICATION

Power Sourcing	: 220V/AC-240V/AC
Power Frequency	: 50Hz
Working Temperature	: -20~+40
Ambient Light	: 3-2000LUX (Adjustable)
Working Humidity	: <93%RH
Power Consumption:	: 0.45W (work) 0.1W (static)
Rated Load	: 1200W (incandescent lamp) 300W (energy-saving lamp)



INFRARED MOTION HUMAN BODY SENSOR

TECHNICAL SPECIFICATIONS

Input Voltage : 220-240VAC
Sensing Ambient Brightness : 3 ~ 2000 lux (adjustable)
Delay Time : 10s-30s-90s-5min-10min-30min
Incandescent lamp : 1200W / LED 500W
Installation Height : 2.5m-3.5m
Detection Distance : 0.5m/6m max
Detection angle : 360°
Moving Speed : 0.6~1.5m/s
Server power consumption : 0.5W



MICROWAVE RADAR SENSOR

TECHNICAL SPECIFICATIONS

Input Voltage : 220-240VAC
Sensing Ambient Brightness : 3 ~ 2000 lux (adjustable)
Delay Time : 8s - 12min
Incandescent lamp : 1200W / LED 500W
Installation Height : 2.5m-3.5m
Detection Distance : 0.5m/6m max
Detection angle : 360°
Moving Speed : 0.6~1.5m/s
Server power consumption : 0.5W




OCCUPANCY SENSOR

PRODUCT SPECIFICATION

Power Sourcing	: 220V/AC-240V/AC
Power Frequency	: 50Hz
Working Temperature	: -20~+40
Ambient Light	: 3-2000LUX (Adjustable)
Working Humidity	: <93%RH
Time-Delay	: min:10sec±3sec max:7min±2m
Installing Height	: 2.2m-4m
Power Consumption:	: 0.45W (work) 0.1W (static)
Detection Distance	: 3-6m
Rated Load	: 1200W (incandescent lamp) 300W (energy-saving lamp)
Detection Motion Speed	: 0.6-1.5m/s



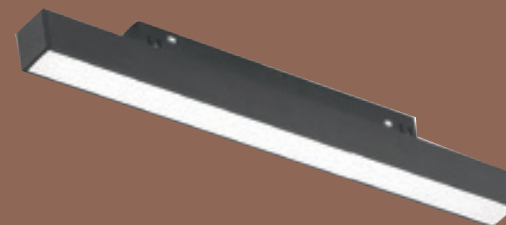

48V

M20 PROFILE

CCT



CRI
Ra≥90

Input
AC90-300V

POWER	FLUX	PF	SIZE
10W	1000Lm	≥0.9	L300*W22*H25MM
20W	2000Lm	≥0.9	L600*W22*H25MM



M20 LINEAR

POWER	FLUX	PF	SIZE
6W	600Lm	≥0.9	L112*W22*H25MM
12W	1200Lm	≥0.9	L220*W22*H25MM

CCT



CRI
Ra≥90

Input
AC90-300V



Hotels



Residential



Offices



Malls



48V



M20 FOLDING



48V

POWER	FLUX	PF	SIZE
6W	600Lm	≥0.9	L135*W22*H100MM
12W	1200Lm	≥0.9	L230*W22*H100MM

CCT




4000K

CRI

Ra≥90

Input

AC90-300V



M20 TRACK

48V

POWER	FLUX	PF	SIZE
10W	1000Lm	≥0.9	W45*H100MM
18W	1800Lm	≥0.9	W65*H100MM

CCT



4000K

CRI

Ra≥90

Input

AC90-300V



Hotels



Residential



Offices




Malls




IP40

M20 MAGNETIC DRIVER

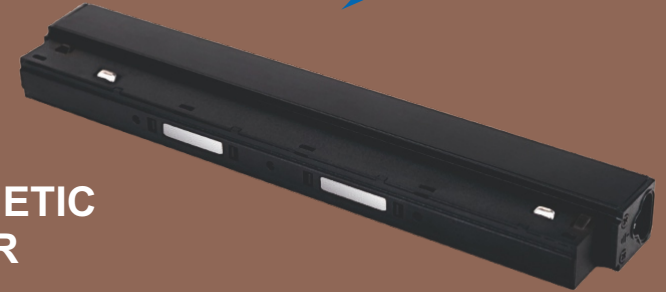

POWER	INPUT	OUTPUT	DIMENSIONS
100W	180-265V	48V 100W	180*20*25 MM
200W	180-265V	48V 200W	250*20*25 MM

48V

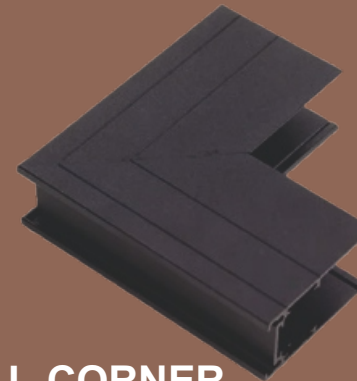

L-CORNER 80*80 MM



L-CONNECTOR 95*17*17 MM



I-CONNECTOR 126*17*17 MM

48V



Hotels



Residential




Offices



Malls




IP40

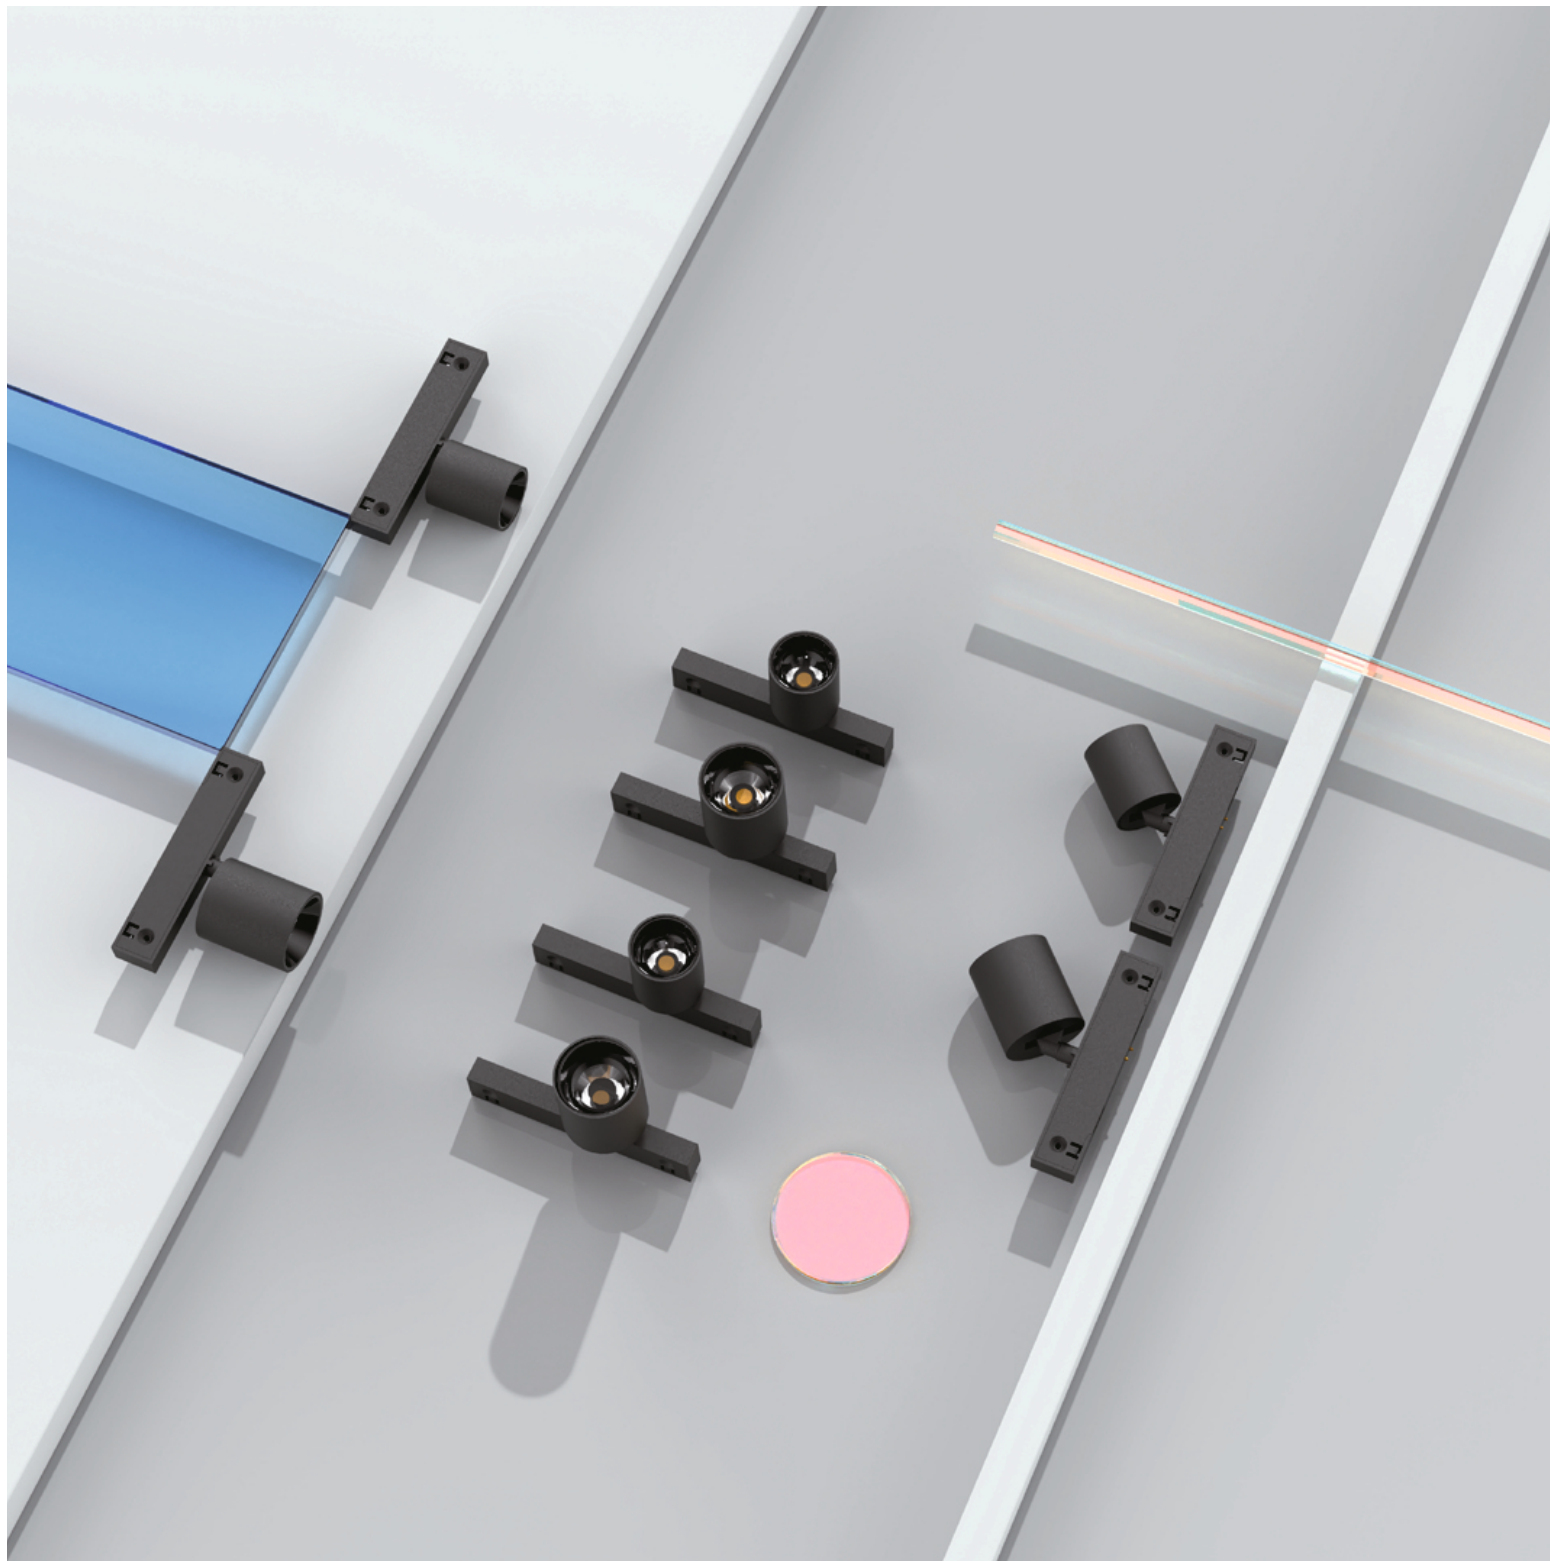

M10 Series

**Magnetic
Track lighting** (Thickness : 2.5mm)

- Profile Light (8W,16W)
- Foldable Grille Light (10W)
- Grille Light (10W,15W)
- Track Light (1*3W, 2*3W, 9W, 10W)
- Spot Light (3W)
- Pendant Light (3W)
- Track Bar (L2000*W45*H23mm)
- Connector
- Power Supply

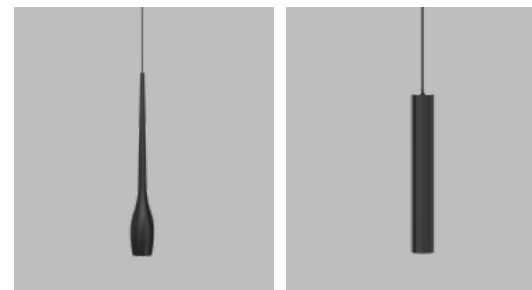



Contact Details

 Mudit Gupta - +91 9289894000

 Nischay Gupta - +91 9810805017

Sales - +91 9318363154

 Office Address - A-1/10, SECTOR-7, ROHINI, DELHI-110085

www.fischerlights.com

